



Raccordi safety-plus

Safety-plus fittings

sf filetto safety femmina "safety" thread


sm filetto safety maschio male "safety" thread

R raccordo fitting

T tubo pipe

M misure dimension

aquatechnik



GIUNTO FILETTATO MASCHIO con filetto in PPS THREADED JOINT MALE with PPS thread


Art. Item	M	T	L	Df	De	Di	Peso Weight	pz pcs	pz pcs
		mm	mm		mm	mm	g		
20000	M1½" - sm14	14-2	61,0	M1½"	25,5	8,0	20,4	10	300
20001	M3/8" - sm16	16-2	61,4	M3/8"	27,5	8,0	23,3	10	300
20002	M1½" - sm16	16-2	63,9	M1½"	27,5	9,5	25,0	10	300
20004	M1½" - sm18	18-2	65,5	M1½"	30,0	11,5	25,5	10	250
20006	M1½" - sm20	20-2	65,7	M1½"	32,6	14,0	30,8	10	250
20010	M3/4" - sm20	20-2	68,2	M3/4"	32,6	14,0	33,7	10	250
20012	M3/4" - sm26	26-3	74,6	M3/4"	41,2	18,0	52,3	5	100
20013	M1" - sm26	26-3	75,1	M1"	41,2	19,0	52,3	5	100
20016	M1" - sm32	32-3	81,3	M1"	50,0	25,0	82,2	5	80
20018	M1¼" - sm40	40-3,5	101,6	M1¼"	60,0	32,0	138,3	1	40
20028	M1½" - sm50	50-4	110,0	M1½"	73,2	40,0	217,3	1	40
20033	M2" - sm63	63-4,5	137,5	M2"	95,0	53,0	465,9	1	10
20039	M2½" - sm75	75-5	155,0	M2½"	115,0	65,2	762,2	1	10
320045*	M3" - sm90	90-7	161,0	M3"	139,0	72,5	4057,0		

* Corpo in bronzo, calotte in PA-M Bronze body, PA-M caps




GIUNTO FILETTATO MASCHIO con inserto in lega THREADED JOINT MALE with alloy thread

Art. Item	M	T	L	Df	De	Di	Peso Weight	pz pcs	pz pcs
		mm	mm		mm	mm	g		
20022	M1½" - sm16	16-2	71,9	M1½"	33,5	9,5	81,4	10	200
20026	M1½" - sm20	20-2	73,5	M1½"	32,6	14,0	85,8	10	200




GIUNTO FILETTATO FEMMINA con filetto in PPS THREADED JOINT FEMALE with PPS thread

Art. Item	M	T	L	Df	De	Di	Peso Weight	 pz pcs	 pz pcs
		mm	mm		mm	mm	g		
20060	F½" - sm14	14-2	52,7	F½"	32,0	8,0	34,5	10	300
20062	F½" - sm16	16-2	55,9	F½"	32,0	9,5	37,5	10	300
20064	F½" - sm18	18-2	57,5	F½"	32,0	11,5	41,9	10	250
20066	F½" - sm20	20-2	57,7	F½"	32,6	14,0	43,7	10	250
20070	F¾" - sm20	20-2	55,2	F¾"	39,0	14,0	46,6	10	250
20072	F¾" - sm26	26-3	61,6	F¾"	41,2	17,8	64,0	5	100
20073	F1" - sm26	26-3	65,6	F1"	41,2	17,8	83,7	5	100
20076	F1" - sm32	32-3	68,3	F1"	50,0	25,0	107,5	5	80
20078	F1¼" - sm40	40-3,5	81,5	F1¼"	60,0	32,0	190,7	1	40
20088	F1½" - sm50	50-4	88,0	F1½"	73,2	40,0	265,1	1	40
20093	F2" - sm63	63-4,5	113,0	F2"	95,0	65,2	562,5	1	15



GIUNTO FILETTATO FEMMINA con inserto in lega THREADED JOINT FEMALE with alloy thread

Art. Item	M	T	L	Df	De	Di	Peso Weight	 pz pcs	 pz pcs
		mm	mm		mm	mm	g		
20082	F½" - sm16	16-2	55,9	F½"	35,0	9,5	67,0	10	200
20086	F½" - sm20	20-2	57,5	F½"	35,0	14,0	72,7	10	200



RIDUZIONE REDUCER


Art. Item	M	T	R	L	De	De1	Di	Peso Weight	 pz pcs	 pz pcs
		mm	mm	mm	mm	mm	mm	g		
20114	sf16 - sm14	14-2	16	54,2	27,5	25,5	8,0	18,1	10	300
20120	sf20 - sm14	14-2	20	57,0	32,3	25,5	8,0	19,4	10	250
20122	sf20 - sm16	16-2	20	60,2	32,3	27,5	9,5	23,3	10	250
20123	sf20 - sm18	18-2	20	61,8	32,3	30,0	11,5	23,6	10	250
20126	sf26 - sm16	16-2	26	64,9	41,2	27,5	9,5	30,6	5	200
20130	sf26 - sm20	20-2	26	66,7	41,2	32,6	14,0	35,2	5	200
20132	sf32 - sm16	16-2	32	68,9	50,0	27,5	9,5	42,7	5	80
20136	sf32 - sm20	20-2	32	70,7	50,0	32,6	14,0	46,6	5	80
20138	sf32 - sm26	26-3	32	76,0	50,0	41,5	17,8	61,6	5	80
20142	sf40 - sm16	16-2	40	74,0	60,0	27,5	9,5	51,9	1	40
20144	sf40 - sm20	20-2	40	75,8	60,0	32,6	14,0	54,7	1	40
20146	sf40 - sm26	26-3	40	81,0	60,0	41,5	17,8	67,2	1	40
20148	sf40 - sm32	32-3	40	84,9	60,0	50,0	25,0	93,0	1	40
20156	sf50 - sm32	32-3	50	93,8	73,0	50,0	25,0	122,3	1	40
20158	sf50 - sm40	40-3,5	50	100,5	73,0	60,0	32,0	148,5	1	40
20166	sf63 - sm32	32-3	63	103,8	95,0	50,0	25,0	220,9	1	30
20168	sf63 - sm40	40-3,5	63	110,5	95,0	60,0	32,0	252,0	1	30
20170	sf63 - sm50	50-4	63	120,5	95,0	73,2	40,0	301,0	1	24
20178	sf75 - sm32	32-3	75	119,8	115,0	50,0	25,0	435,8	1	20
20180	sf75 - sm40	40-3,5	75	126,5	115,0	60,0	32,0	457,9	1	20
20182	sf75 - sm50	50-4	75	136,5	115,0	73,2	40,0	476,3	1	16
20184	sf75 - sm63	63-4,5	75	153,0	115,0	95,0	53,0	670,0	1	12
320193*	sf90 - sm63	63-4,5	90	158,0	139,0	95,0	53,0	3570,4		
320194*	sf90 - sm75	75-5	90	163,5	139,0	115,5	65,5	4112,0		

* Corpo in bronzo, calotte in PA-M Bronze body, PA-M caps




GOMITO 90° FILETTATO FEMMINA con filetto in PPS e staffa
THREADED ELBOW 90° FEMALE with PPS thread and bracket

Art. Item	M	T	L	L1	H	H1	H2	Df	De	Di	Peso Weight	pz pcs	pz pcs
		mm	mm	mm	mm	mm	mm	mm	mm	mm	g		
20212	F½"- sm16	16-2	70,8	54,8	45,0	30,5	39,0	F½"	27,5	9,5	51,0	10	200
20216	F½"- sm20	20-2	74,5	58,5	47,0	30,5	39,0	F½"	32,6	14,0	57,2	10	150




GOMITO 90° FILETTATO FEMMINA con inserto in lega e staffa
THREADED ELBOW 90° FEMALE with alloy thread and bracket

Art. Item	M	T	L	L1	H	H1	H2	Df	De	Di	Peso Weight	pz pcs	pz pcs
		mm	mm	mm	mm	mm	mm		mm	mm	g		
20202	F½"- sm16	16-2	72,3	54,8	45,0	30,5	37,0	F½"	27,5	9,5	79,7	10	150
20206	F½"- sm20	20-2	76,0	58,5	47,0	30,5	37,0	F½"	32,6	14,0	87,3	10	150




GOMITO 90° FILETTATO FEMMINA con filetto in PPS
THREADED ELBOW 90° FEMALE with PPS thread

Art. Item	M	T	L	L1	H	H1	Df	De	Di	Peso Weight	pz pcs	pz pcs
		mm	mm	mm	mm	mm		mm	mm	g		
20222	F½"- sm16	16-2	70,8	54,8	44,3	30,5	F½"	27,5	9,5	45,9	10	250
20226	F½"- sm20	20-2	74,5	58,5	46,8	30,5	F½"	32,6	14,0	52,3	10	200
20230	F¾"- sm20	20-2	80,7	61,2	44,8	28,5	F¾"	32,6	14,0	57,4	10	150
20232	F¾"- sm26	26-3	87,1	67,6	52,6	32,0	F¾"	41,2	17,8	79,5	5	100
20238	F1"- sm32	32-3	100,5	76,3	63,0	38,0	F1"	50,0	24,8	132,3	5	60




GOMITO 90° FILETTATO FEMMINA con inserto in lega
THREADED ELBOW 90° FEMALE with alloy thread

Art. Item	M	T	L	L1	H	H1	Df	De	Di	Peso Weight	pz pcs	pz pcs
		mm	mm	mm	mm	mm		mm	mm	g		
20262	F½"- sm16	16-2	72,3	54,8	44,3	30,5	F½"	27,5	9,5	71,2	10	250
20266	F½"- sm20	20-2	76,0	58,5	46,8	30,5	F½"	32,6	14,0	80,5	10	150

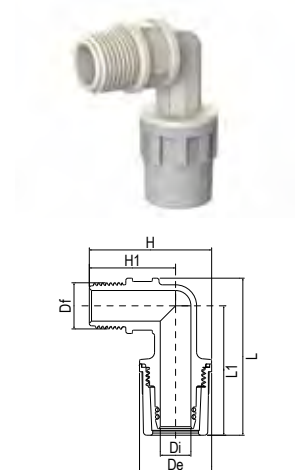


GOMITO 90° FILETTATO MASCHIO con filetto in PPS *THREADED ELBOW 90° MALE with PPS thread*

Art. Item	M	T	L	L1	H	H1	Df	De	Di	Peso Weight		
		mm	mm	mm	mm	mm		mm	mm	g	pz pcs	pz pcs
20282	M½" - sm16	16-2	67,3	54,8	52,8	39,0	M½"	27,5	9,5	30,0	10	250
20286	M½" - sm20	20-2	71,0	58,5	55,3	39,0	M½"	32,6	14,0	36,0	10	200
20288	M¾" - sm20	20-2	76,9	61,2	57,8	41,5	M¾"	32,6	14,0	44,6	10	150
20290	M¾" - sm26	26-3	83,3	67,6	65,6	45,0	M¾"	41,2	18,0	66,4	5	100
20296	M1" - sm32	32-3	75,8	76,3	76,0	51,0	M1"	50,0	25,0	103,9	5	60

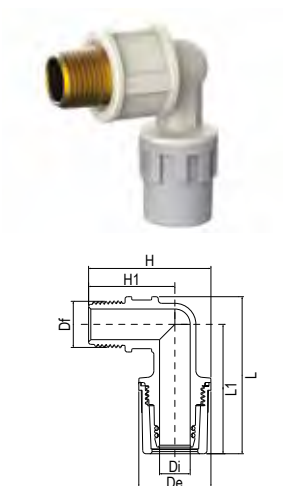


GOMITO 90° FILETTATO MASCHIO con inserto in lega *THREADED ELBOW 90° MALE with alloy thread*

Art. Item	M	T	L	L1	H	H1	Df	De	Di	Peso Weight		
		mm	mm	mm	mm	mm		mm	mm	g	pz pcs	pz pcs
20322	M½" - sm16	16-2	71,3	54,8	60,3	46,5	M½"	27,5	9,5	88,5	10	200
20326	M½" - sm20	20-2	75,0	58,5	55,3	46,5	M½"	32,6	14,0	100,1	10	150

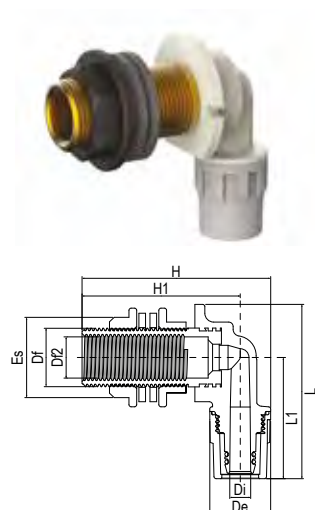


GOMITO 90° CON FILETTATURA PROLUNGATA MASCHIO/FEMMINA con inserto in ottone, per pareti prefabbricate, lunghezza filetto 51 mm *ELBOW 90° WITH EXTENDED THREAD MALE/FEMALE with brass thread, for prefabricated walls, thread length 51 mm*

Art. Item	M	T	L	L1	H	H1	Df	Df2	De	Di	Es	Peso Weight		
		mm	mm	mm	mm	mm			mm	mm	mm	g	pz pcs	pz pcs
20330	M¾"-F½" - sm16	16-2	78,8	54,8	85,3	71,5	M¾"	F½"	27,5	9,5	36,0	150,4	5	100

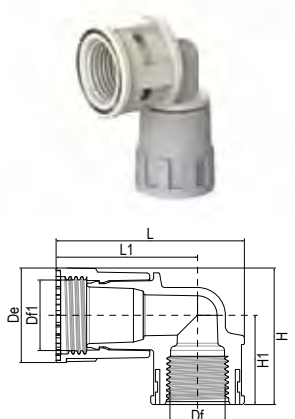


GOMITO 90° FILETTATO FEMMINA/FEMMINA con filetto in PPS, a calotta girevole *THREADED ELBOW 90° FEMALE/FEMALE with PPS thread and turning cap*

Art. Item	M	R	L	L1	H	H1	Df	De	Peso Weight		
		mm	mm	mm	mm	mm		mm	g	pz pcs	pz pcs
20332	F½" - sf16	16	62,0	46,0	44,3	30,5	F½"	27,5	39,0	10	200
20336	F½" - sf20	20	64,3	48,3	46,7	30,5	F½"	32,5	45,6	10	150
20337	F¾" - sf26	26	76,5	57,0	52,8	32,0	F¾"	41,5	69,6	5	100
20338	F1" - sf32	32	88,5	64,3	63,0	38,0	F1"	50,0	110,8	5	80

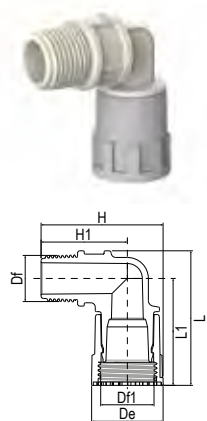


GOMITO 90° FILETTATO MASCHIO/FEMMINA con filetto in PPS, a calotta girevole
THREADED ELBOW 90° MALE/FEMALE with PPS thread and turning cap

Art. Item	M	R	L	L1	H	H1	Df	De	Peso Weight	 pz pcs	 pz pcs
		mm	mm	mm	mm	mm		mm	g		
20342	M½" - sf16	16	58,8	46,3	52,8	39,0	M½"	27,5	24,1	10	200
20344	M½" - sf20	20	60,8	48,3	55,2	39,0	M½"	32,6	29,4	10	150
20346	M¾" - sf26	26	68,7	53,0	65,8	45,0	M¾"	41,2	54,0	5	100
20348	M1" - sf32	32	78,6	59,1	76,0	51,0	M1"	50,0	80,7	5	80

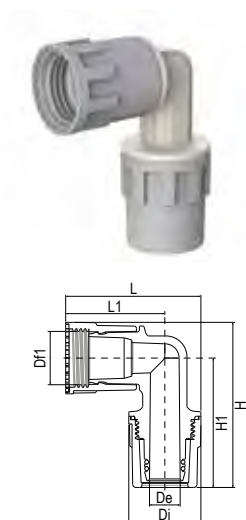


GOMITO 90° MASCHIO/FEMMINA a calotta girevole
ELBOW 90° MALE/FEMALE with turning cap

Art. Item	M	T	R	L	L1	H	H1	De	Di	Peso Weight	 pz pcs	 pz pcs
		mm	mm (Df1)	mm	mm	mm	mm	mm	mm	g		
20352	sf16 - sm16	16-2	16	54,0	40,3	68,6	54,8	27,5	9,5	32,1	10	200
20356	sf20 - sm20	20-2	20	61,1	44,8	76,7	58,5	32,6	14,0	45,0	10	150
20358	sf26 - sm26	26-3	26	73,6	53,0	84,4	63,6	41,2	18,0	83,2	5	80
20360	sf32 - sm32	32-3	32	83,5	58,5	97,3	72,3	50,0	25,0	129,8	5	50
20362	sf40 - sm40	40-3,5	40	100,6	70,6	118,5	88,5	60,0	32,0	214,3	1	20

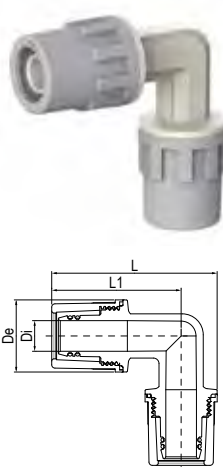


GOMITO 90°
ELBOW 90°

Art. Item	M	T	L	L1	De	Di	Peso Weight	 pz pcs	 pz pcs
		mm	mm	mm	mm	mm	g		
20382	sm16 - sm16	16-2	68,6	54,8	27,5	9,5	37,0	10	250
20386	sm20 - sm20	20-2	74,8	58,5	32,6	14,0	51,7	10	150
20388	sm26 - sm26	26-3	84,2	63,6	41,2	18,0	94,2	5	60
20390	sm32 - sm32	32-3	97,3	72,3	50,0	25,0	153,1	5	40
20392	sm40 - sm40	40-3,5	118,4	88,5	60,0	32,0	244,3	1	30
20394	sm50 - sm50	50-4	140,6	104,0	73,2	40,0	404,2	1	15
20396	sm63 - sm63	63-4,5	179,0	131,5	95,0	53,0	867,4	1	8
20398	sm75 - sm75	75-5	212,8	155,0	115,0	65,2	1452,1	1	4
20400	sm90 - sm90	90-7	241,5	172,0	139,0	72,5	2599,0	1	

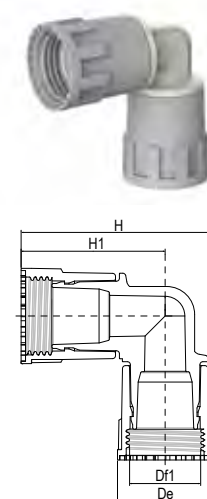


GOMITO 90° FEMMINA/FEMMINA a calotte girevoli
ELBOW 90° FEMALE/FEMALE with turning caps

Art. Item	M	R	H	H1	De	Peso Weight	 pz pcs	 pz pcs
		mm (Df1)	mm	mm	mm	g		
20402	sf16 - sf16	16	57,9	44,1	27,5	27,5	10	250
20406	sf20 - sf20	20	65,0	48,8	32,5	38,6	10	200
20408	sf26 - sf26	26	78,8	58,0	41,5	76,0	5	100
20410	sf32 - sf32	32	89,5	64,5	50,0	116,3	5	60

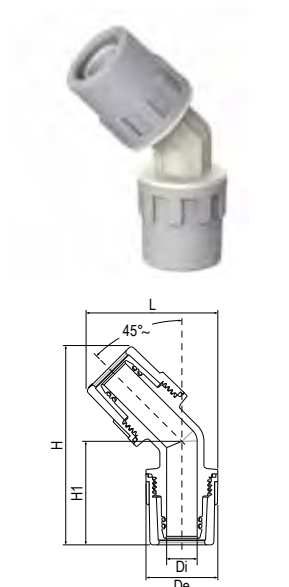


GOMITO 45° ELBOW 45°

Art. Item	M	T	L	H	H1	De	Di	Peso Weight	 pz pcs	 pz pcs
		mm	mm	mm	mm	mm	mm	g		
20416	sm20 - sm20	20-2	59,8	90,5	47,0	32,6	14,0	46,3	10	120
20418	sm26 - sm26	26-3	72,2	106,3	54,8	41,2	18,0	85,2	5	50
20420	sm32 - sm32	32-3	83,3	118,6	30,3	50,0	25,0	136,1	5	50
20422	sm40 - sm40	40-3,5	99,0	139,0	70,0	60,0	32,0	218,9	1	20
20424	sm50 - sm50	50-4	118,3	164,7	83,0	73,2	40,0	365,1	1	15
20426	sm63 - sm63	63-4,5	151,1	208,1	104,4	95,0	53,0	784,5	1	10
20428	sm75 - sm75	75-5	180,1	244,4	122,0	115,0	65,0	1327,3	1	6
20430	sm90 - sm90	90-7	210,0	279,0	138,0	139,0	72,5	2379,6	1	

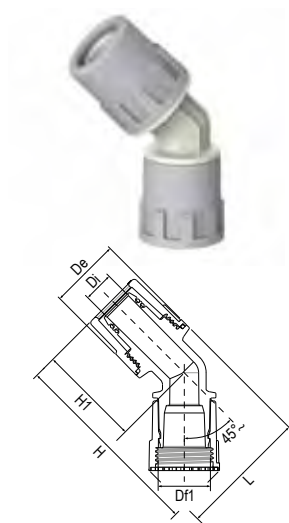

GOMITO 45° MASCHIO/FEMMINA a calotta girevole ELBOW 45° MALE/FEMALE with turning cap


Art. Item	M	T	R	L	H	H1	De	Di	Peso Weight	 pz pcs	 pz pcs
		mm	mm (Df1)	mm	mm	mm	mm	mm	g		
20432	sm20 - sf20	20-2	20	59,4	90,1	47,0	27,5	14,0	42,6	10	120
20433	sm26 - sf26	26-3	26	72,8	106,9	54,8	32,6	18,0	79,9	5	50
20434	sm32 - sf32	32-3	32	84,0	119,3	60,3	41,2	25,0	121,2	5	30
20435	sm40 - sf40	40-3,5	40	101,1	141,2	70,1	50,0	32,0	195,0	1	20
20436	sm50 - sf50	50-4	50	125,5	171,9	83,0	50,0	40,0	336,8	1	20



MANICOTTO PIPE COUPLING


Art. Item	M	T	L	De	Di	Peso Weight	 pz pcs	 pz pcs
		mm	mm	mm	mm	g		
20440	sm14 - sm14	14-2	70,0	25,5	8,0	25,9	10	250
20442	sm16 - sm16	16-2	78,8	27,5	9,5	32,0	10	250
20444	sm18 - sm18	18-2	81,0	30,0	11,5	35,8	10	200
20446	sm20 - sm20	20-2	82,4	32,6	14,0	43,8	10	200
20448	sm26 - sm26	26-3	92,2	41,2	18,0	80,2	5	80
20450	sm32 - sm32	32-3	99,6	50,0	25,0	131,8	5	60
20452	sm40 - sm40	40-3,5	117,0	60,0	32,0	203,2	1	40
20454	sm50 - sm50	50-4	141,0	73,2	40,0	339,3	1	30
20456	sm63 - sm63	63-4,5	179,0	95,0	53,0	731,1	1	12
20458	sm75 - sm75	75-5	207,0	115,0	65,2	1231,6	1	8
320460*	sm90 - sm90	90-7	246,0	139,0	72,5	7069,9	1	

* Corpo in bronzo, calotte in PA-M Bronze body, PA-M caps




MANICOTTO RIDOTTO REDUCED PIPE COUPLING

Art. Item	M	T	L	De	De1	Di	Di1	Peso Weight	 pz pcs	 pz pcs
		mm	mm	mm	mm	mm	mm	g		
20472	sm20 - sm16	20-2 16-2	77,6	32,6	27,5	14,0	9,5	39,2	10	200
20480	sm26 - sm20	26-3 20-2	85,8	41,2	32,6	18,0	15,0	62,3	10	80



NIPPLES FEMMINA/FEMMINA a calotte girevoli NIPPLES FEMALE/FEMALE with turning caps

Art. Item	M	R	L	De	Peso Weight	pz pcs	pz pcs
		mm	mm	mm	g		
20522	sf16 - sf16	16	65,2	27,5	23,5	10	250
20526	sf20 - sf20	20	69,7	32,3	31,8	10	200
20528	sf26 - sf26	26	80,0	41,5	59,4	5	150
20530	sf32 - sf32	32	85,0	50,0	87,5	5	60
20532	sf40 - sf40	40	97,3	60,0	134,7	1	40
20534	sf50 - sf50	50	126,4	73,2	247,3	1	30

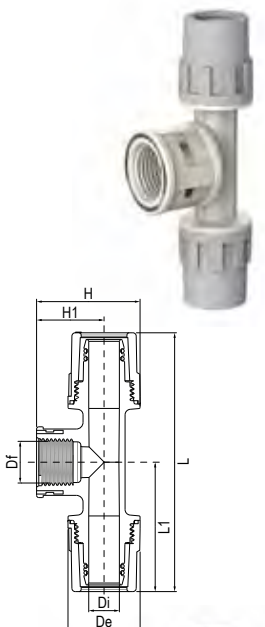

TEE FILETTATO FEMMINA con filetto in PPS THREADED TEE FEMALE with PPS thread

Art. Item	M	T	L	L1	H	H1	Df	De	Di	Peso Weight	pz pcs	pz pcs
		mm	mm	mm	mm	mm		mm	mm	g		
20542	sm16 - F½" - sm16	16-2	109,6	54,8	44,3	30,5	F½"	27,5	9,5	63,2	10	150
20546	sm20 - F½" - sm20	20-2	117,0	58,5	46,8	30,5	F½"	32,6	14,0	75,4	10	120
20550	sm26 - F¾" - sm26	26-3	135,2	67,6	52,6	32,0	F¾"	41,2	18,0	121,1	5	50
20556	sm32 - F1" - sm32	32-3	152,6	76,3	63,0	38,0	F1"	50,0	25,0	200,5	5	30





TEE FILETTATO FEMMINA con inserto in lega THREADED TEE FEMALE with alloy thread


Art. Item	M	T	L	L1	H	H1	Df	De	Di	Peso Weight	pz pcs	pz pcs
		mm	mm	mm	mm	mm		mm	mm	g		
20582	sm16 - F½" - sm16	16-2	109,6	54,8	44,3	30,5	F½"	27,5	9,5	91,1	10	150
20586	sm20 - F½" - sm20	20-2	117,0	58,5	46,8	30,5	F½"	32,6	14,0	103,1	10	120



TEE FILETTATO FEMMINA ECCENTRICO con filetto in PPS, completo di staffe distanziali THREADED TEE FEMALE with PPS thread and distance brackets

Art. Item	M	T	L	L1	H	H1	Df	De	Di	Peso Weight	pz pcs	pz pcs
		mm	mm	mm	mm	mm		mm	mm	g		
20592	sm16 - F½" - sm16	16-2	109,6	54,8	48,3	18,5	F½"	27,5	9,5	65,5	10	100
20596	sm20 - F½" - sm20	20-2	117,0	58,5	50,8	18,5	F½"	32,6	14,0	76,9	10	80







TEE FILETTATO FEMMINA ECCENTRICO con inserto in lega, completo di staffe distanziali *THREADED TEE FEMALE with alloy thread and distance brackets*

Art. Item	M	T	L	L1	H	H1	Df	De	Di	Peso Weight		
		mm	mm	mm	mm	mm		mm	mm	g	pz pcs	pz pcs
20606	sm20 - F½" - sm20	20-2	117,0	58,5	50,3	18,5	F½"	32,6	14,0	81,2	10	80


TEE FILETTATO FEMMINA AD ANGOLO 90° con inserto in lega e staffa *THREADED TEE FEMALE ANGLE 90° with alloy thread and bracket*


Art. Item	M	T	L	L1	H	H2	Df	De	Di	Peso Weight		
		mm	mm	mm	mm	mm		mm	mm	g	pz pcs	pz pcs
20632	sm16 - F½" - sm16	16-2	82,7	48,9	47,0	39,0	F½"	27,5	9,5	97,7	10	100



TEE *TEE*

Art. Item	M	T	L	L1	H	H1	De	Di	Peso Weight		
		mm	mm	mm	mm	mm		mm	g	pz pcs	pz pcs
20662	sm16-sm16-sm16	16-2	109,6	54,8	68,5	54,8	27,5	9,5	54,3	10	100
20666	sm20-sm20-sm20	20-2	117,0	58,5	74,8	58,5	32,6	14,0	75,0	10	80
20668	sm26-sm26-sm26	26-3	127,2	63,6	84,2	63,6	41,2	18,0	136,2	5	40
20670	sm32-sm32-sm32	32-3	144,6	72,3	97,3	72,3	50,0	25,0	221,9	5	30
20672	sm40-sm40-sm40	40-3,5	177,0	88,5	118,4	88,5	60,0	32,0	351,3	1	20
20674	sm50-sm50-sm50	50-4	208,0	104,0	140,6	104,0	73,2	40,0	582,1	1	10
20676	sm63-sm63-sm63	63-4,5	263,0	131,5	179,0	131,5	95,0	53,0	1250,3	1	5
20678	sm75-sm75-sm75	75-5	310,0	155,0	212,8	155,0	115,0	65,2	2104,4	1	3
20680	sm90-sm90-sm90	90-7	344,0	172,0	241,5	172,0	139,0	72,5	3746,2	1	

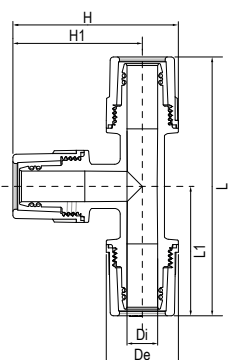

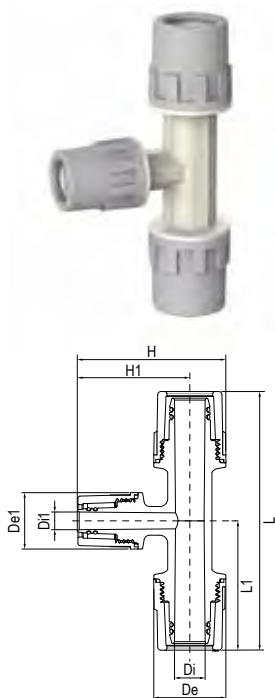


TEE RIDOTTO REDUCED TEE


Art. Item	M	T	L	L1	H	H1	De	De1	Di	Di1	Peso Weight	pz pcs	pz pcs
		mm	mm	mm	mm	mm	mm	mm	mm	mm	g		
20712	sm16-sm14-sm16	16-2 14-2	109,6	54,8	64,7	50,9	27,5	25,5	9,5	8,0	52,7	10	100
20717	sm20-sm16-sm16	20-2 16-2	113,3	58,5	71,1	54,8	32,6	27,5	14,0	9,5	65,6	10	80
20718	sm20-sm14-sm20	20-2 14-2	117,0	58,5	67,2	50,9	32,6	25,5	14,0	8,0	67,3	10	80
20720	sm20-sm16-sm20	20-2 16-2	117,0	58,5	71,1	54,8	32,6	27,5	14,0	9,5	68,4	10	80
20722	sm20-sm18-sm20	20-2 18-2	117,0	58,5	73,7	57,4	32,6	30,0	14,0	11,5	74,7	5	40
20724	sm26-sm14-sm26	26-3 14-2	135,2	67,6	71,5	50,9	41,2	25,5	18,0	8,0	113,1	5	40
20725	sm26-sm16-sm26	26-3 16-2	135,2	67,6	75,4	54,8	41,2	27,5	18,0	9,5	117,3	5	60
20726	sm26-sm18-sm26	26-3 18-2	135,2	67,6	78,0	57,4	41,2	30,0	18,0	11,5	118,2	5	40
20728	sm26-sm20-sm26	26-3 20-2	127,2	63,6	76,6	56,0	41,2	32,6	18,0	14,0	117,1	5	40
20730	sm32-sm14-sm32	32-3 14-2	152,6	76,3	75,9	50,9	50,0	25,5	25,0	8,0	172,7	5	30
20732	sm32-sm16-sm32	32-3 16-2	152,6	76,3	79,8	54,8	50,0	27,5	25,0	9,5	175,8	5	40
20734	sm32-sm18-sm32	32-3 18-2	152,6	76,3	82,4	57,4	50,0	30,0	25,0	11,5	213,4	5	40
20735	sm32-sm20-sm32	32-3 20-2	152,6	76,3	83,5	58,5	50,0	32,6	25,0	14,0	181,8	5	40
20736	sm32-sm26-sm32	32-3 26-3	144,6	72,3	88,6	63,6	50,0	41,2	25,0	18,0	191,9	5	30
20740	sm40-sm16-sm40	40-3,5 16-2	177,0	88,5	81,4	51,4	60,0	27,5	32,0	9,5	267,2	1	20
20742	sm40-sm20-sm40	40-3,5 20-2	177,0	88,5	83,0	53,0	60,0	32,6	32,0	14,0	272,1	1	20
20744	sm40-sm26-sm40	40-3,5 26-3	177,0	88,5	88,6	58,6	60,0	41,2	32,0	18,0	289,4	1	20
20746	sm40-sm32-sm40	40-3,5 32-3	177,0	88,5	106,3	76,3	60,0	50,0	32,0	25,0	310,7	1	20
20750	sm50-sm16-sm50	50-4 16-2	208,0	104,0	93,0	56,4	73,2	27,5	40,0	9,5	438,6	1	15
20754	sm50-sm20-sm50	50-4 20-2	208,0	104,0	94,8	58,2	73,2	32,6	40,0	14,0	443,6	1	15
20756	sm50-sm26-sm50	50-4 26-3	208,0	104,0	100,7	64,1	73,2	41,2	40,0	18,0	460,1	1	15
20758	sm50-sm32-sm50	50-4 32-3	208,0	104,0	104,4	67,8	73,2	50,0	40,0	25,0	464,9	1	15
20760	sm50-sm40-sm50	50-4 40-3,5	208,0	104,0	125,0	88,5	73,2	60,0	40,0	32,0	509,2	1	15
20762	sm63-sm16-sm63	63-4,5 16-2	263,0	131,5	110,9	63,4	95,0	27,5	53,0	9,5	887,2	1	8
20766	sm63-sm20-sm63	63-4,5 20-2	263,0	131,5	113,0	65,5	95,0	32,6	53,0	14,0	891,7	1	8
20768	sm63-sm26-sm63	63-4,5 26-3	263,0	131,5	118,9	71,4	95,0	41,2	53,0	18,0	906,7	1	8
20770	sm63-sm32-sm63	63-4,5 32-3	263,0	131,5	122,3	74,8	95,0	50,0	53,0	25,0	944,9	1	8
20772	sm63-sm40-sm63	63-4,5 40-3,5	263,0	131,5	130,0	82,5	95,0	60,0	53,0	32,0	964,4	1	6
20774	sm63-sm50-sm63	63-4,5 50-4	263,0	131,5	151,5	104,0	95,0	73,2	53,0	40,0	1042,3	1	6
20778	sm75-sm20-sm75	75-5 20-2	310,0	155,0	130,8	73,0	115,0	32,6	65,2	14,0	143,72	1	3
20788	sm75-sm63-sm75	75-5 50-4	310,0	155,0	189,3	131,5	115,0	95,0	65,2	53,0	1822,1	1	3
20794	sm90-sm32-sm90	90-7 32-3	344,0	172,0	157,8	88,3	139,0	50,0	72,5	25,0	2666,6	1	
20800	sm90-sm63-sm90	90-7 63-4,5	344,0	172,0	213,0	144,0	139,0	95,0	72,5	53,0	2986,4	1	
20802	sm90-sm75-sm90	90-7 75-5	344,0	172,0	244,5	155,0	139,0	115,0	72,5	65,0	3954,3	1	



BOCCHETTONE DRITTO con filetto in PPS e bocchettone in ottone PIPE UNION with PPS thread and alloy tang

Art. Item	M	T	L	L1	Df	De	Di	Es	Peso Weight	pz pcs	pz pcs
		mm	mm	mm		mm	mm	mm	g		
20832	F $\frac{3}{4}$ " - sm16	16-2	85,4	55,9	F $\frac{3}{4}$ "	32,0	9,5	30,0	95,6	5	100
20836	F $\frac{3}{4}$ " - sm20	20-2	87,2	57,7	F $\frac{3}{4}$ "	32,5	14,0	30,0	99,5	5	100
20840	F1" - sm26	26-3	93,6	61,6	F1"	41,2	18,0	38,0	146,2	5	50
20844	F1 $\frac{1}{4}$ " - sm32	32-3	105,8	71,3	F1 $\frac{1}{4}$ "	50,0	25,0	46,0	255,9	5	40




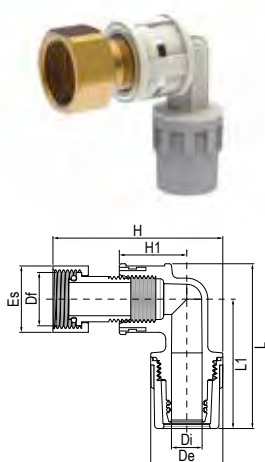

BOCCHETTONE CURVO con filetto in PPS e bocchettone in ottone

BENT PIPE UNION with PPS thread and alloy tang


Art. Item	M	T	L	L1	H	H1	Df	De	Di	Es	Peso Weight	 pz pcs	 pz pcs
		mm	mm	mm	mm	mm		mm	mm		g		
20862	F¾" - sm16	16-2	70,8	54,8	73,8	30,5	F¾"	27,5	9,5	30,0	101,7	5	100
20866	F¾" - sm20	20-2	74,5	58,5	76,8	30,5	F¾"	32,6	14,0	30,0	108,1	5	100
20870	F1" - sm26	26-3	87,1	67,6	85,6	32,0	F1"	41,2	18,0	38,0	171,1	5	50
20874	F1¼" - sm32	32-3	100,5	76,3	98,5	38,0	F1¼"	50,0	25,0	46,0	281,0	5	40



BOCCHETTONE in PPS, ispezionabile

PIPE UNION in PPS, inspectable

Art. Item	M	T	R	L	L1	De	Di	Peso Weight	 pz pcs	 pz pcs
		mm	mm	mm	mm	mm	mm	g		
20882	sf16 - sm16	16-2	16,0	54,5	30,4	27,5	9,5	21,0	5	100
20886	sf20 - sm20	20-2	20,0	59,7	32,2	32,6	14,0	30,8	5	100
20888	sf26 - sm26	26-3	26,0	67,2	37,4	41,2	18,0	53,1	5	100
20890	sf32 - sm32	32-3	32,0	71,3	41,3	50,0	25,0	81,5	5	80




TAPPO DI CHIUSURA MASCHIO

CLOSING CAP MALE

Art. Item	M	T	L	L1	De	Peso Weight	 pz pcs	 pz pcs
		mm	mm	mm	mm	g		
20902	sm16	16-2	43,4	30,4	27,6	16,6	10	300
20906	sm20	20-2	47,2	32,2	32,6	23,1	10	250
20908	sm26	26-3	52,1	37,6	41,2	47,4	5	200
20910	sm32	32-3	56,8	41,3	50,0	75,1	5	150
20912	sm40	40-3,5	75,0	48,0	60,0	132,7	1	70
20914	sm50	50-4	90,5	58,0	73,2	216,5	1	40
20916	sm63	63-4,5	110,0	74,5	95,0	453,1	1	24
20918	sm75	75-5	124,0	85,5	115,5	758,5	1	14
320920*	sm90	90-7	135,0	100,0	139,0	3826,2	1	


* Corpo in bronzo, calotte in PA-M Bronze body, PA-M caps



TAPPO DI CHIUSURA FEMMINA

CLOSING CAP FEMALE

Art. Item	M	R	L	De	Peso Weight	 pz pcs	 pz pcs
		mm (Df1)	mm	mm	g		
20952	sf16	16	31,3	27,2	7,3	10	500
20956	sf20	20	33,0	32,3	10,5	10	500
20958	sf26	26	36,1	41,2	18,6	5	300
20960	sf32	32	39,0	50,0	29,7	5	200
20962	sf40	40	46,8	60,0	41,1	1	50
20964	sf50	50	54,0	73,0	74,5	1	50
20966	sf63	63	73,5	95,0	191,1	1	20
20968	sf75	75	86,5	115,0	409,6	1	12

**TAPPO RIDUTTORE** solo per valvola sfiato aria e valvola di scarico**CLOSING CAP MALE** only for vent and drain set

Art. Item	M	T	L	Df	De	Di	Peso Weight		
		mm	mm		mm	mm	g	pz pcs	pz pcs
21064	F½" - sm26	26-3	52,1	F½"	41,2	18,0	57,4	5	200
21066	F½" - sm32	32-3	56,8	F½"	50,0	25,0	83,5	1	150

**RUBINETTO D'ARRESTO** con vitone in lega, ad incasso, con cappuccio chiuso e rosone cromati**SHUT-OFF VALVE** screw closing, built-in, with chrome-plated cap and washer

Art. Item	M	T	L	L1	H	H1	De	D	Peso Weight		
		mm	mm	mm	mm	mm	mm	mm	g	pz pcs	pz pcs
21202	sm16 - sm16	16-2	109,8	54,9	100,0	86,3	27,5	70,0	268,1	1	30
21206	sm20 - sm20	20-2	117,0	58,5	102,6	86,3	32,6	70,0	281,9	1	30
21208	sm26 - sm26	26-3	135,2	67,6	112,9	92,3	41,2	70,0	393,6	1	30


**RUBINETTO D'ARRESTO**

con vitone in lega, ad incasso, con cappuccio chiuso e rosone in ABS cromato e placchette caldo/freddo


SHUT-OFF VALVE


screw closing, built-in, with plated cap and washer of chromed ABS

Art. Item	Misure nom. Nom. measures	T	L	L1	H	H1	De	D	Peso Weight		
	mm	mm	mm	mm	mm	mm	mm	mm	g	pz pcs	pz pcs
21212	sm16 - sm16	16-2	109,8	54,9	98,5	84,8	27,5	70,0	219,0	1	30
21216	sm20 - sm20	20-2	117,0	58,5	101,1	84,8	32,6	70,0	232,8	1	30
21218	sm26 - sm26	26-3	135,2	67,6	110,4	89,8	41,2	70,0	344,5	1	30

**RUBINETTO D'ARRESTO** con vitone in lega, ad incasso, con maniglia e rosone cromati**SHUT-OFF VALVE** screw closing, built-in, with chrome-plated handle and washer

Art. Item	M	T	L	L1	H	H1	De	D	Peso Weight		
		mm	mm	mm	mm	mm	mm	mm	g	pz pcs	pz pcs
21232	sm16 - sm16	16-2	109,8	54,9	127,6	113,8	27,5	70,0	411,0	1	30
21236	sm20 - sm20	20-2	117,0	58,5	130,1	113,8	32,6	70,0	424,8	1	30
21238	sm26 - sm26	26-3	135,2	67,6	139,4	118,8	41,2	70,0	532,4	1	30






RUBINETTO D'ARRESTO

con vitone in lega, ad incasso, con cappuccio chiuso e rosone in ABS cromato e placchette caldo/freddo

SHUT-OFF VALVE

screw closing, built-in, with plated handle and washer of chromed ABS


Art. Item	M	T	L	L1	H	H1	De	D	Peso Weight		
		mm	mm	mm	mm	mm	mm	mm	g	pz pcs	pz pcs
21242	sm16 - sm16	16-2	109,8	54,9	130,3	116,5	27,5	70,0	258,5	1	30
21246	sm20 - sm20	20-2	117,0	58,5	130,3	116,5	32,6	70,0	272,3	1	30
21248	sm26 - sm26	26-3	135,2	67,6	141,7	121,1	41,2	70,0	379,9	1	30



RUBINETTO D'ARRESTO con vitone in lega, per esterno, con volantino

SHUT-OFF VALVE screw closing, for outside, with handwheel auger

Art. Item	M	T	L	L1	H	H1	De	D	Peso Weight		
		mm	mm	mm	mm	mm	mm	mm	g	pz pcs	pz pcs
21262	sm16 - sm16	16-2	109,8	54,9	95,2	81,4	27,5	56,0	229,0	1	30
21266	sm20 - sm20	20-2	117,0	58,5	97,7	81,4	32,6	56,0	242,8	1	30
21268	sm26 - sm26	26-3	135,2	67,6	102,5	81,9	41,2	56,0	451,7	1	30

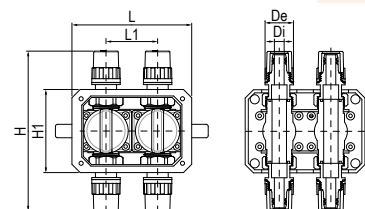


MONOBLOCCO D'ARRESTO

con coppia di valvole a sfera in ottone, attacco 3/4", in scatola di plastica ispezionabile, senza sportello, completo di bocchetttoni

STOP VALVE MONOBLOCK

with pair brass ball valves, 3/4" thread, in open plastic box, complete with pipe unions


Art. Item	M	T	L	L1	H	H1	De	D	Peso Weight		
		mm	mm	mm	mm	mm	mm	mm	g	pz pcs	pz pcs
21272	sm16 - sm16	16-2	116,0	50,0	154,8	80,5	27,5	9,5	1149,7	1	
21274	sm20 - sm20	20-2	116,0	50,0	154,8	80,5	32,6	14,0	1228,3	1	



VALVOLA A SFERA con maniglia a farfalla e corpo in lega

BALL VALVE with butterfly handle and alloy body

Art. Item	M	T	L	L1	H	H1	De	Peso Weight		
		mm	mm	mm	mm	mm	mm	g	pz pcs	pz pcs
21282	sm16 - sm16	16-2	133,2	30,0	52,6	38,9	27,5	167,9	5	50
21286	sm20 - sm20	20-2	131,6	30,0	57,7	41,4	32,6	290,9	5	50
21288	sm26 - sm26	26-3	149,5	35,0	65,7	45,1	41,2	383,7	1	30
21290	sm32 - sm32	32-3	169,7	35,0	70,1	45,1	50,0	644,8	1	30



VALVOLA A SFERA IN PP con corpo, sfera e ghiera in PP, collari in PPS e calotte in PA-M

BALL VALVE IN PP with body and ring-nut of PP, collars of PPS, cap of PA-M

Art. Item	M	T	L	L1	H	H1	De	Di	Peso Weight	 pz pcs	 pz pcs
		mm	mm	mm	mm	mm	mm	mm	g		
21002	sm16 - sm16	16-2	165,3	48,1	72,9	45,6	50,3	9,5	167,3	1	35
21006	sm20 - sm20	20-2	169,9	48,1	72,9	45,6	50,3	14,0	207,3	1	25
21008	sm26 - sm26	26-3	193,2	58,7	86,7	56,7	59,0	18,0	264,4	1	25
21010	sm32 - sm32	32-3	207,1	58,7	105,0	64,7	70,4	25,0	382,7	1	15
21012	sm40 - sm40	40-3,5	238,1	63,2	129,4	83,4	86,0	32,0	677,4	1	10
21014	sm50 - sm50	50-4	265,8	63,2	144,4	89,4	99,5	40,0	916,9	1	7
21016	sm63 - sm63	63-4,5	321,2	107,3	184,7	114,7	125,5	53,0	1727,7	1	3

COLLARE CON FLANGIA

COLLARS WITH FLANGE

Art. Item	M	DN	T	L	L1	D	D1	De	Di	 *	Viti Screws	Peso Weight	 pz pcs	 pz pcs
		mm	mm	mm	mm	mm	mm	mm	mm	nr.		g		
21632	sm16	10-16	16-2	54,6	23,2	106,0	65,0	27,5	9,5	4	M12	408,1	1	
21636	sm20	10-16	20-2	56,4	23,2	106,0	65,0	32,6	14,0	4	M12	412,2	1	
21638	sm26	10-16	26-3	63,8	23,7	118,0	75,0	41,2	18,0	4	M12	520,8	1	
21640	sm32	10-16	32-3	67,7	25,9	122,0	85,0	50,0	25,0	4	M12	602,0	1	
21642	sm40	10-16	40-3,5	77,0	27,0	142,0	100,0	60,0	32,0	4	M16	689,9	1	
21644	sm50	10-16	50-4	88,0	28,0	156,0	110,0	73,2	40,0	4	M16	920,3	1	
21646	sm63	10-16	63-4,5	109,6	32,6	171,0	125,0	95,0	53,0	4	M16	1363,7	1	

* Fori Holes

COLLETTORE componibile per posa libera e sottomuratura




MODULAR MANIFOLD free-laying and walled-in


Art. Item	M	T	R	L	L1	H	De	De1	Di	Di1	Peso Weight	 pz pcs	 pz pcs
		mm	mm (Df)	mm	mm	mm	mm	mm	mm	mm	g		
21300	sf20-sm14-sm20	20-2 14-2	20	81,7	35,0	44,5	32,6	25,5	14,0	8,0	41,4	10	150
21302	sf20-sm16-sm20	20-2 16-2	20	81,7	35,0	47,4	32,6	27,5	14,0	9,5	43,9	10	150
21303	sf26-sm14-sm26	26-3 14-2	26	96,6	40,5	49,5	41,2	25,5	18,0	8,0	61,0	5	100
21304	sf26-sm16-sm26	26-3 16-2	26	96,6	40,5	52,4	41,2	27,5	18,0	9,5	63,4	5	80
21305	sf26-sm18-sm26	26-3 18-2	26	96,6	40,5	54,0	41,2	30,0	18,0	11,5	66,3	5	80
21307	sf26-sm20-sm26	26-3 20-2	26	96,6	40,5	54,2	41,2	32,6	18,0	14,0	67,4	5	80

COLLETTORE MULTIRAPID per distribuzione acqua sanitaria, con vitone in lega

MULTIRAPID MANIFOLD for sanitary water conveyance, with shut-off valve


Art. Item	M	T	R	L	L1	H	H1	De	De1	Peso Weight	 pz pcs	 pz pcs
		mm	mm (Df)	mm	mm	mm	mm	mm	mm	g		
21312	sf20-sm16-sm20	20-2 16-2	20	81,7	35,0	100,8	47,4	32,6	27,5	105,1	10	100
21316	sf26-sm16-sm26	26-3 16-2	26	96,6	40,5	105,8	52,4	41,2	27,5	125,6	5	80
21322	sf32-sm16-sm32	32-3 16-2	32	103,8	43,0	113,7	55,4	50,0	27,5	166,4	5	40
21326	sf32-sm20-sm32	32-3 20-2	32	103,8	43,0	112,3	55,4	50,0	32,6	173,0	5	40

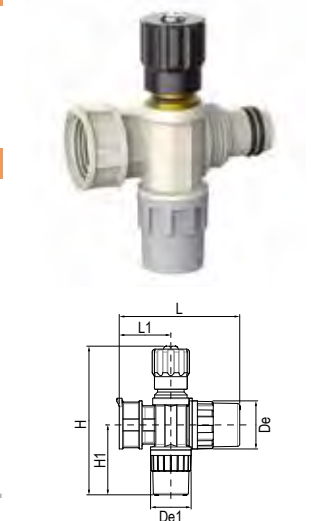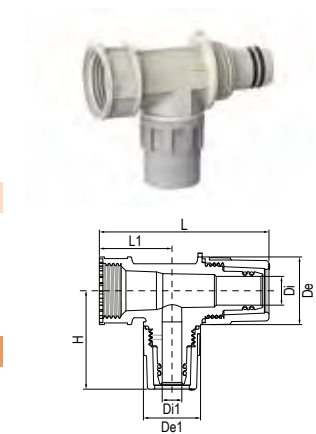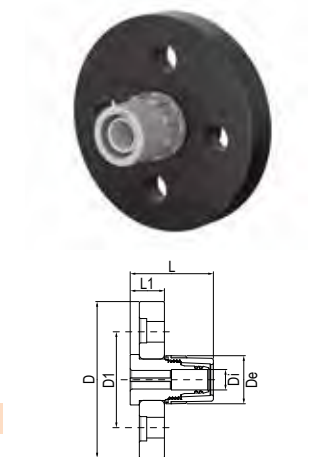

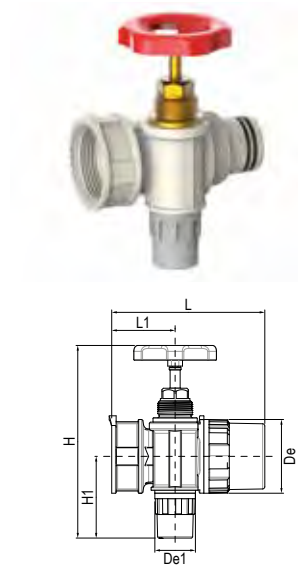


COLLETTORE MULTIRAPID per distribuzione acqua sanitaria, con vitone in lega
MULTIRAPID MANIFOLD for sanitary water conveyance, with shut-off valve

Art. Item	M	T	R	L	L1	H	H1	De	De1	Peso Weight	pz pcs	pz pcs
		mm	mm (Df)	mm	mm	mm	mm	mm	mm	g		
21342	sf32-sm16-sm32	32-3 16-2	32	103,8	43,0	130,6	55,4	50,0	27,5	177,6	5	40
21346	sf32-sm20-sm32	32-3 20-2	32	103,8	43,0	129,2	55,4	50,0	32,6	184,2	5	40
21348	sf40-sm20-sm40	40-3,5 20-2	40	131,5	55,0	132,9	56,7	60,0	32,6	247,4	1	30
21350	sf40-sm26-sm40	40-3,5 26-3	40	131,5	55,0	143,5	66,8	60,0	41,2	486,6	1	20

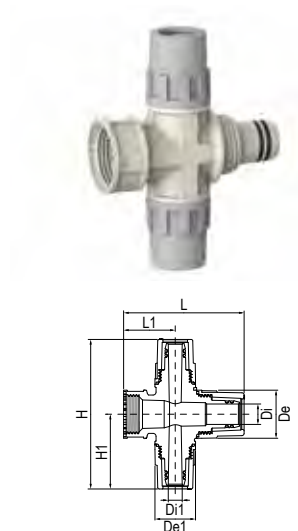


COLLETTORE A CROCE per posa libera e sottomuratura
CROSS MANIFOLD open laid exposed and walled-in

Art. Item	M	T	R	L	L1	H	H1	De	De1	Di	Di1	Peso Weight	pz pcs	pz pcs
		mm	mm (Df)	mm	mm	mm	mm	mm	mm	mm	mm	g		
21400	sf20-sm14-sm20	20-2 14-2	20	81,7	35,0	95,6	47,8	32,6	25,5	14,0	8,0	61,4	10	120
21402	sf20-sm16-sm20	20-2 16-2	20	81,7	35,0	101,4	50,7	32,6	27,5	14,0	9,5	66,0	10	120
21404	sf26-sm14-sm26	26-3 14-2	26	96,6	40,5	99,0	49,5	41,2	25,5	18,0	8,0	75,4	5	80
21406	sf26-sm16-sm26	26-3 16-2	26	96,6	40,5	104,8	52,4	41,2	27,5	18,0	9,5	80,9	5	80
21408	sf26-sm18-sm26	26-3 18-2	26	96,6	40,5	108,0	54,0	41,2	30,0	18,0	11,5	88,5	5	80

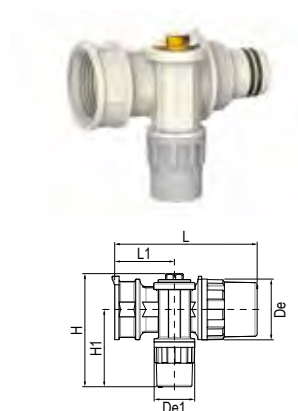


COLLETTORE Componibile MULTIRAPID con tappo in lega d'ottone
MODULAR MANIFOLD MULTIRAPID with brass alloy cap

Art. Item	M	T	R	L	L1	H	H1	De	De1	Peso Weight	pz pcs	pz pcs
		mm	mm (Df)	mm	mm	mm	mm	mm	mm	g		
21600	sf26-sm14-sm26	26-3 14-2	26,0	96,6	40,5	73,5	49,5	41,2	25,5	116,9	5	80
21602	sf26-sm16-sm26	26-3 16-2	26,0	96,6	40,5	76,7	52,4	41,2	27,5	120,1	5	80
21604	sf26-sm18-sm26	26-3 18-2	26,0	96,6	40,5	78,3	54,0	41,2	30,0	122,8	5	80
21608	sf32-sm16-sm32	32-3 16-2	32,0	103,8	43,0	83,7	55,4	50,0	27,5	200,1	5	60
21612	sf32-sm20-sm32	32-3 20-2	32,0	103,8	43,0	82,3	55,2	50,0	32,6	206,7	5	50
21620	sf40-sm20-sm40	40-3,5 20-2	40,0	131,5	55,0	86,0	56,7	60,0	32,6	269,9	1	25
21622	sf40-sm26-sm40	40-3,5 26-3	40,0	131,5	55,0	91,3	63,1	60,0	41,2	283,3	1	20

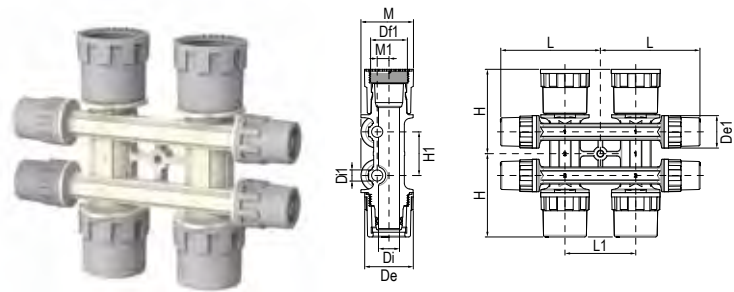


COLLETTORE COMPLANARE modulare
COMPLANAR MANIFOLD modular

Art. Item	M	T	R	L	L1	H	H1	De	De1	Di	Di1	M	M1	Peso Weight		
		mm	mm (Df)	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	g	pz pcs	pz pcs
21658	sm26-sm16-sf26	26-3 16-2	26	84,4	60,0	71,5	37,0	41,2	27,5	18,0	9,5	44,5	10,0	276,3	1	20

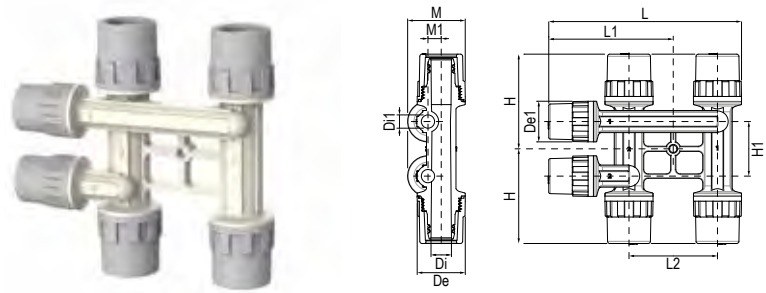


COLLETTORE DI DERIVAZIONE
COMPLANAR MANIFOLD

Art. Item	M	T	L	L1	L2	H	H1	De	De1	Di	Di1	M	M1	Peso Weight		
		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	g	pz pcs	pz pcs
21685	sm20-sm16-sm20	20-2 16-2	130,7	84,4	60,0	64,2	37,0	32,6	27,5	14,0	9,5	39,0	9,0	163,3	1	25
21689	sm26-sm16-sm26	26-3 16-2	135,0	84,4	60,0	70,6	37,0	41,2	27,5	18,0	9,5	44,4	9,0	247,6	1	25

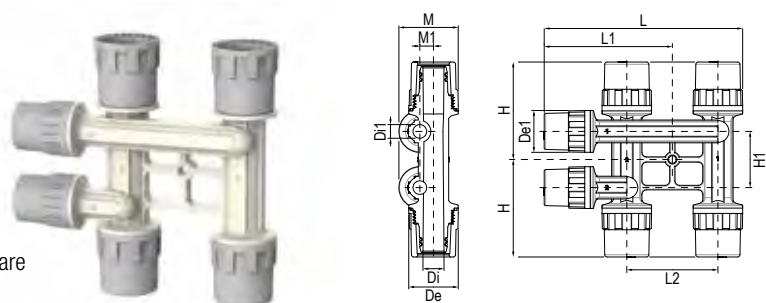


COLLETTORE DI DERIVAZIONE MASCHIO/FEMMINA modulare
DERIVATION MANIFOLD MALE/FEMALE modular

Art. Item	M	T	R	L	L1	L2	H	H1	H2	De	De1	Di	Di1	M	M1	Peso Wt.		
		mm	mm (Df)	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	g	pz pcs	pz pcs
21745	sm20-sm16-sf20	20-2 16-2	20	130,7	84,4	60,0	129,5	64,2	37,0	32,6	27,5	14,0	9,5	39,0	9,0	156,0	1	25

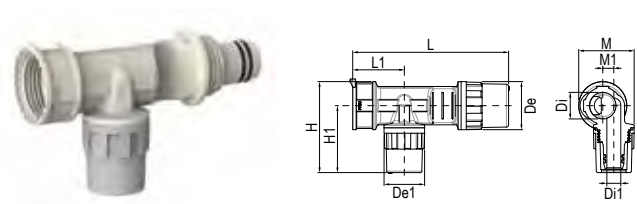

COLLETTORE A SORPASSO modulare
SWAN NEK MANIFOLD modular

Art. Item	M	T	R	L	L1	H	H1	De	De1	Di	Di1	M	M1	Peso Weight		
		mm	mm (Df)	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	g	pz pcs	pz pcs
21782	sf20-sm16-sm20	20-2 16-2	20	105,7	35,0	61,7	45,4	32,6	27,5	14,0	9,5	37,6	7,5	51,0	10	150



RACCORDO DI DERIVAZIONE con filetto in PPS, a calotta girevole

DERIVATION FITTING with PPS thread and turning cap


Art. Item	M	T	R	L	L1	H	Df	Di	Peso Weight	 pz pcs	 pz pcs
		mm	mm (Df1)	mm	mm	mm		mm	g		
21806	sf26 -F½"-sm26	26-3	26	102,8	53,5	50,8	F½"	18,0	82,7	1	50
21810	sf32 -F½"-sm32	32-3	32	108,0	56,0	55,0	F½"	25,0	104,5	1	50



Raccordi safety-metal

Safety-metal fittings


sf filetto safety femmina female "safety" thread



GIUNTO FILETTATO MASCHIO THREADED JOINT MALE

Art. Item	M	T	L	Df	De	Di	Peso Weight		
		mm	mm		mm	mm	g	pz pcs	pz pcs
30022	M1½" - sm16	16-2	56,5	M1½"	27,5	9,5	80,0	10	200
30026	M1½" - sm20	20-2	58,5	M1½"	32,6	14,0	102,4	10	200
30030	M¾" - sm26	26-3	66,2	M¾"	41,2	17,8	181,2	5	100
30032	M1" - sm26	26-3	74,8	M1"	41,2	17,8	218,9	5	80
30034	M1" - sm32	32-3	78,6	M1"	50,0	25,0	281,5	5	50


sm filetto safety maschio male "safety" thread



GIUNTO FILETTATO MASCHIO/FEMMINA THREADED JOINT MALE/FEMALE

Art. Item	M	T	L	Df	De	Di	Peso Weight		
		mm	mm		mm	mm	g	pz pcs	pz pcs
30044	M1½" - sf20	20-2	47,4	M1½"	32,4	14,0	90,1	10	200
30045	M¾" - sf26	20-2	48,6	M¾"	41,0	17,8	161,7	5	100
30046	M¾" - sf32	26-3	52,0	M¾"	50,0	25,0	206,2	5	100
30048	M1" - sf26	26-3	46,8	M1"	41,0	17,8	170,9	5	100
30047	M1" - sf32	32-3	55,1	M1"	50,0	25,0	221,6	5	100
30050	M1¼" - sf40	40-3,5	60,9	M1¼"	59,8	32,0	351,9	1	50

R raccordo fitting




T tubo pipe

M misure dimension

GIUNTO FILETTATO MASCHIO per collettori safety Ø 26 e 32 mm THREADED JOINT MALE for safety manifolds Ø 26 and 32 mm


Art. Item	M	R	L	Df	De	Di	Peso Weight		
		mm	mm		mm	mm	g	pz pcs	pz pcs
30070	M1" - sf26	26	33,5	M1"	39,9	19,4	126,4	1	100
30072	M1¼" - sf32	32	54,5	M1¼"	41,9	31,4	296,4	1	100

LEGENDA aquatechnik




GIUNTO FILETTATO FEMMINA THREADED JOINT FEMALE

Art. Item	M	T	L	Df	De	Di	Peso Weight		
		mm	mm		mm	mm	g	pz pcs	pz pcs
30082	F½" - sm16	16-2	48,1	F½"	32,0	9,5	83,0	10	200
30086	F½" - sm20	20-2	50,6	F½"	32,6	14,0	106,9	10	200
30088	F¾" - sm20	20-2	52,0	F¾"	39,0	14,0	127,4	5	100
30090	F¾" - sm26	26-3	57,7	F¾"	41,2	17,8	182,1	5	100
30094	F1" - sm32	32-3	54,8	F1"	50,0	25,0	194,8	5	50



GIUNTO FILETTATO FEMMINA/FEMMINA THREADED JOINT FEMALE/FEMALE

Art. Item	M	R	L	Df	De	Es	Peso Weight		
		mm	mm		mm	mm	g	pz pcs	pz pcs
30106	F½" - sf20	20	44,5	F½"	32,3	25,9	93,9	10	200
30107	F½" - sf26	26	49,5	F½"	41,0	29,9	159,2	5	100
30108	F¾" - sf26	26	49,3	F¾"	41,0	33,9	178,1	5	100
30109	F¾" - sf32	32	52,5	F¾"	50,0	33,9	217,2	5	100
30110	F1" - sf32	32	51,9	F1"	50,0	40,9	270,7	5	100
30111	F½" - sf32	32	52,0	F½"	50,0	30,0	177,7	5	100




RIDUZIONE REDUCER


Art. Item	M	T	R	L	De	Di	Es	Peso Weight		
		mm	mm	mm	mm	mm	mm	g	pz pcs	pz pcs
30122	sf20 - sm16	16-2	20	61,3	34,0	9,5	27,0	117,0	10	150
30124	sf26 - sm16	16-2	26	64,4	40,0	9,5	31,9	143,2	10	100
30126	sf26 - sm20	20-2	26	65,2	40,0	14,0	32,0	163,5	10	100
30128	sf32 - sm16	16-2	32	72,5	50,0	9,5	41,0	255,0	10	50
30130	sf32 - sm20	20-2	32	70,3	50,0	14,0	41,0	259,9	5	50
30132	sf32 - sm26	26-3	32	70,9	50,0	17,8	41,0	268,1	5	50



GOMITO 90° FILETTATO FEMMINA con staffa THREADED ELBOW 90° FEMALE with bracket


Art. Item	M	T	L	L1	H	H1	H2	Df	De	Di	Peso Weight		
		mm	mm	mm	mm	mm	mm	mm	mm	mm	g	pz pcs	pz pcs
30202	F½" - sm16	16-2	70,2	54,2	43,4	30,0	37,0	F½"	27,5	9,5	155,6	10	150
30206	F½" - sm20	20-2	74,6	60,4	46,4	30,0	37,0	F½"	32,6	14,0	186,5	10	100






GOMITO 90° FILETTATO FEMMINA THREADED ELBOW 90° FEMALE

Art. Item	M	T	L	L1	H	H1	Df	De	Di	Peso Weight	pz pcs	pz pcs
		mm	mm	mm	mm	mm		mm	mm	g		
30262	F½" - sm16	16-2	69,6	55,4	44,4	30,7	F½"	27,5	9,5	138,0	10	80
30266	F½" - sm20	20-2	74,6	60,3	47,8	31,5	F½"	32,6	14,0	165,7	10	60
30270	F¾" - sm26	26-3	90,6	75,2	57,3	36,7	F¾"	41,2	17,8	300,1	5	50
30274	F1" - sm32	32-3	104,6	82,4	67,8	42,8	F1"	50,0	24,8	492,3	5	40




GOMITO 90° FILETTATO MASCHIO THREADED ELBOW 90° MALE

Art. Item	M	T	L	L1	H	H1	Df	De	Di	Peso Weight	pz pcs	pz pcs
		mm	mm	mm	mm	mm		mm	mm	g		
30322	M½" - sm16	16-2	70,0	55,8	51,5	37,8	M½"	27,5	9,5	169,5	10	150
30326	M½" - sm20	20-2	74,4	60,3	55,4	39,1	M½"	32,6	14,0	190,4	10	100
30330	M¾" - sm26	26-3	90,5	72,3	73,5	52,9	M¾"	41,2	18,0	402,5	5	50
30334	M1" - sm32	32-3	101,2	79,1	88,3	63,3	M1"	50,0	25,0	612,4	5	40



GOMITO 90° ELBOW 90°

Art. Item	M	T	L	L1	De	Di	Peso Weight	pz pcs	pz pcs
		mm	mm	mm	mm	mm	g		
30382	sm16- sm16	16-2	71,0	57,3	27,5	9,5	144,7	10	100
30386	sm20- sm20	20-2	74,3	58,0	32,6	14,0	203,9	10	100
30390	sm26- sm26	26-3	91,6	71,0	41,2	18,0	402,7	5	50
30394	sm32- sm32	32-3	107,3	82,3	50,0	25,0	590,3	5	30




MANICOTTO PIPE COUPLING

Art. Item	M	T	L	De	Di	Peso Weight	pz pcs	pz pcs
		mm	mm	mm	mm	g		
30442	sm16- sm16	16-2	77,8	27,5	9,5	126,8	10	150
30446	sm20- sm20	20-2	83,3	32,6	14,0	161,0	10	100
30450	sm26- sm26	26-3	98,4	41,2	18,0	300,2	5	50
30454	sm32- sm32	32-3	103,6	50,0	25,0	414,5	5	40




TEE FILETTATO FEMMINA THREADED TEE FEMALE

Art. Item	M	T	L	L1	H	H1	Df	De	Di	Peso Weight	 pz pcs	 pz pcs
		mm	mm	mm	mm	mm		mm	mm	g		
30582	sm16 - F½" - sm16	16-2	112,6	56,3	43,8	30,1	F½"	27,5	9,5	203,2	10	100
30586	sm20 - F½" - sm20	20-2	120,2	60,1	46,6	30,3	F½"	32,6	14,0	251,8	10	80
30590	sm26 - F¾" - sm26	26-3	144,8	72,4	58,3	37,7	F¾"	41,2	18,0	487,0	5	40




TEE FILETTATO FEMMINA ECCENTRICO completo di staffe distanziali THREADED TEE FEMALE with distance brackets


Art. Item	M	T	L	L1	H	H1	Df	De	Di	Peso Weight	 pz pcs	 pz pcs
		mm	mm	mm	mm	mm		mm	mm	g		
30606	sm20 - F½" - sm20	20-2	117,8	58,9	49,5	17,9	F½"	32,6	14,0	271,4	10	80

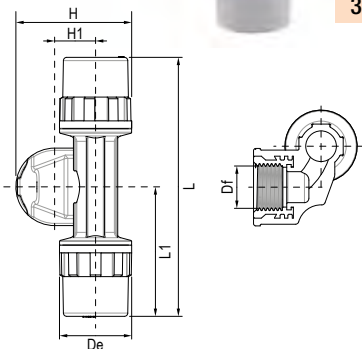

TEE TEE

Art. Item	M	T	L	L1	H	H1	De	Di	Peso Weight	 pz pcs	 pz pcs
		mm	mm	mm	mm	mm		mm	g		
30662	sm16-sm16-sm16	16-2	112,4	56,2	70,5	56,8	27,5	9,5	228,6	10	100
30666	sm20-sm20-sm20	20-2	120,2	60,1	76,7	60,4	32,6	14,0	307,7	10	80
30670	sm26-sm26-sm26	26-3	143,6	71,8	92,6	72,0	41,2	18,0	596,2	5	30
30674	sm32-sm32-sm32	32-3	164,6	82,3	106,9	81,9	50,0	25,0	854,2	5	15

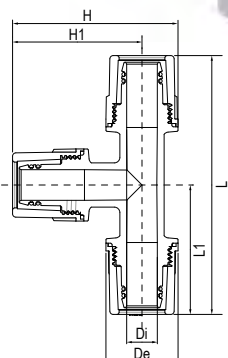

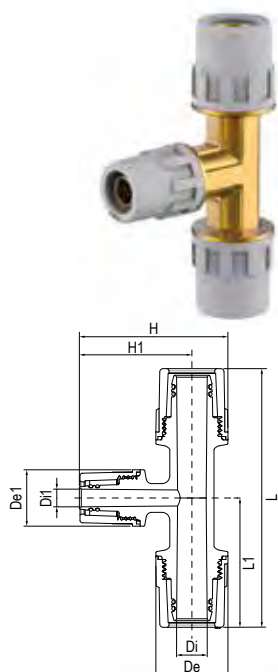


TEE RIDOTTO REDUCED TEE

Art. Item	M	T	L	L1	H	H1	De	De1	Di	Di1	Peso Weight	pz pcs	pz pcs
		mm	mm	mm	mm	mm	mm	mm	mm	mm	g		
30720	sm20-sm16-sm20	20-2 16-2	120,2	60,1	75,4	59,1	32,6	27,5	14,0	9,5	310,2	10	60
30730	sm26-sm20-sm26	26-3 20-2	144,6	72,3	87,3	66,7	41,2	32,6	18,0	14,0	558,9	5	30
30746	sm32-sm20-sm32	32-3 20-2	164,6	82,3	97,5	72,5	50,0	32,6	25,0	14,0	804,8	5	20
30752	sm32-sm26-sm32	32-3 26-3	164,6	82,3	103,0	78,0	50,0	41,2	25,0	18,0	809,4	5	20




BOCCHETTONE DRITTO PIPE UNION

Art. Item	M	T	L	L1	Df	De	Di	Es	Peso Weight	pz pcs	pz pcs
		mm	mm	mm		mm	mm	mm	g		
30832	F¾" - sm16	16-2	70,9	48,1	F¾"	32,0	9,5	30,0	152,1	5	100
30836	F¾" - sm20	20-2	73,8	50,6	F¾"	32,5	14,0	30,0	176,0	5	100
30840	F1" - sm26	26-3	82,9	57,7	F1"	41,2	18,0	38,0	292,1	5	50
30844	F1¼" - sm32	32-3	84,4	54,8	F1¼"	50,0	25,0	46,0	364,0	5	40




BOCCHETTONE CURVO BENT PIPE UNION

Art. Item	M	T	L	L1	H	H1	Df	De	Di	Es	Peso Weight	pz pcs	pz pcs
		mm	mm	mm	mm	mm		mm	mm		g		
30862	F¾" - sm16	16-2	69,6	55,4	70,5	44,4	F¾"	27,5	9,5	30,0	207,1	5	100
30866	F¾" - sm20	20-2	74,6	60,3	72,5	47,8	F¾"	32,6	14,0	30,0	234,8	5	100
30870	F1" - sm26	26-3	90,6	75,2	81,2	57,3	F1"	41,2	18,0	38,0	408,8	5	50
30874	F1¼" - sm32	32-3	104,6	82,4	105,8	67,8	F1¼"	50,0	25,0	46,0	674,7	5	40



SCORREVOLE telescopico, per giunti in opera e riparazioni SLIDING JOINT telescopic, for installed joints and repairs

Art. Item	M	L	Df	Df1	Es	Es1	Peso Weight	pz pcs	pz pcs
		mm	mm		mm	mm	g		
31050	F½" - M½"	min 112 - max 158	F½"	M½"	29,0	27,0	226,5	1	50



Qualità, Affidabilità e Innovazione al vostro servizio
Quality, Reliability and Innovation at your Service

Certificazioni internazionali
International approvals



Workshop per Ingegneri e Progettisti
Workshops for Engineers and Designers



Workshop per Installatori
Workshops for Installers



Assistenza tecnica
Technical assistance



Collettori e pezzi speciali
Manifolds and special fittings



Centri tecnico/dimostrativi
Demonstrative/training centers



BIM ready



Skeinforce
THE CONSTRUCTION NETWORK

